


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 4 TOWNSHIP 14 RANGE 5
DATE: 6-28-01-1-11-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-22-98

IN. S.P.C. E ZONE, NAD 83
NAME: 14050402
N: 493888.2541(m)
E: 73115.5541(m)

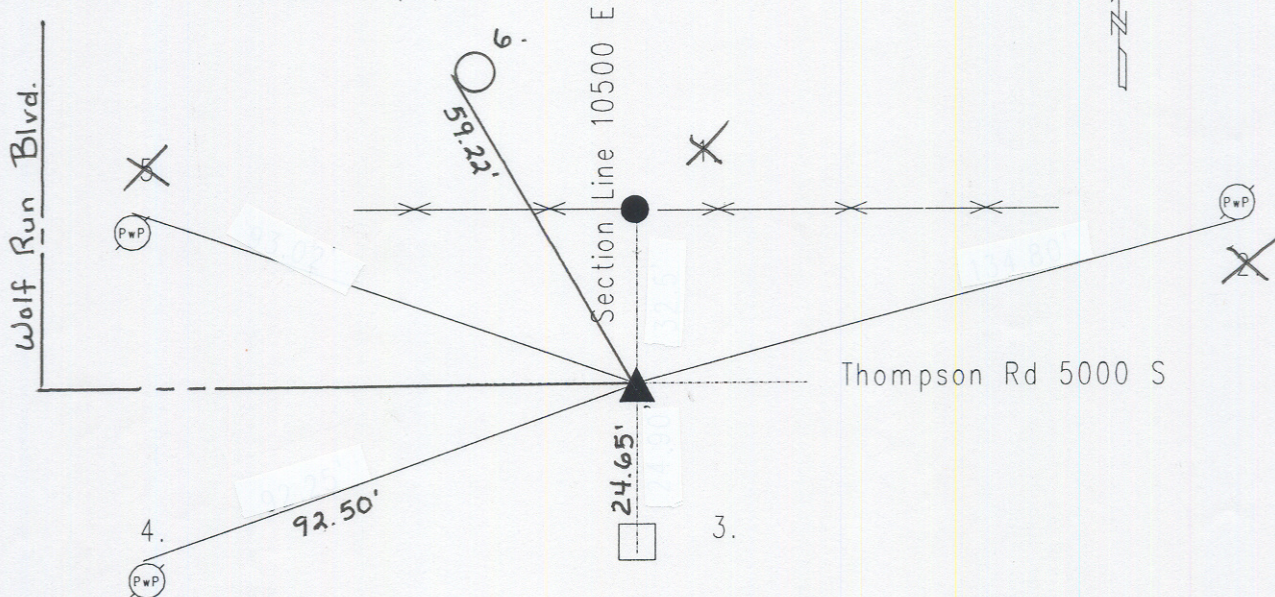

Original post set 1820 by John Hendricks with witnesses: 24" beech N 87 E 41 links; 8" dogwood N 73 W 34 links per Marion County Atlas pg. 13. Mayhew 9-29-1858 indicates no stone but witnee: 22" beech S 42 W 45 links; 30" elm N 12 E 41 links per Franklin Township Legal Survey Book pg. 31. Monroe 12-3-54 called pipe over stone. Monroe 6-19-61 called same. GWS 6-12-62 called same. Bookedis 9-30-68 called PK nail. McLand 1972 called iron rod over stone 8" dn. Miller 3-15-76 called PK nail. Wilcoxon 2-6-80 called PK nail. Jacobs 8-1-87 called PK nail. Whiteside 1-6-94 called PK nail. Wilcoxon 7-22-98 called cottongin spindle. Excavated by Wilcoxon 6-28-01 and cottongin spindle fd. 3" dn. Stone fd 15" dn. Harrison set.

14050402

REF.	DISTANCE	DESCRIPTION
1.	32.5' +/-	Due N to fence line
2.	134.80'	PK nail S PwP#1 711PA 20"up
3.	24.65'	Due S to concrete 4"x4" property marker
4.	92.50'	PK nail N PwP#43-711 CB 8"up
5.	93.02'	PK nail N PwP#15-711CA 18"up
6.	59.22'	Mag nail w/bw W PwP#15-711 CA 15"up